
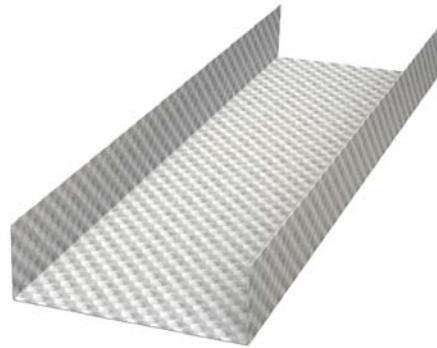


UltraSTEEL® Drywall Nonload-Bearing (Nonstructural) Track (UT-Series™) Economical top and bottom plate or runner used to secure drywall studs to the floor and ceiling.


- Available in multiple leg heights
- Standard 10' lengths, custom lengths available
- Available Sizes:
1-5/8", 2-1/2", 3-1/2"* , 3-5/8", 4", 5-1/2"* and 6"
- Available Gauges: 25 EQ, 20 DW EQ and 20 STR* EQ
EQ = Equivalent to traditional metal stud gauges
- Product Code Designators
(Product) (Gauge) (Leg)
UT N = 25EQ B = 1-1/4" Leg
E = 20DWEQ D = 2" Leg
X = 20STREQ* F = 3" Leg

* Available in limited markets


UltraSTEEL® track or runner is manufactured from corrosion-resistant, galvanized steel for corresponding stud sizes and gauges. The inside width of the track or web is equivalent to the outside width of the studs. Varying leg heights are available for deflection conditions or to accommodate uneven or inconsistent floor or ceiling conditions.

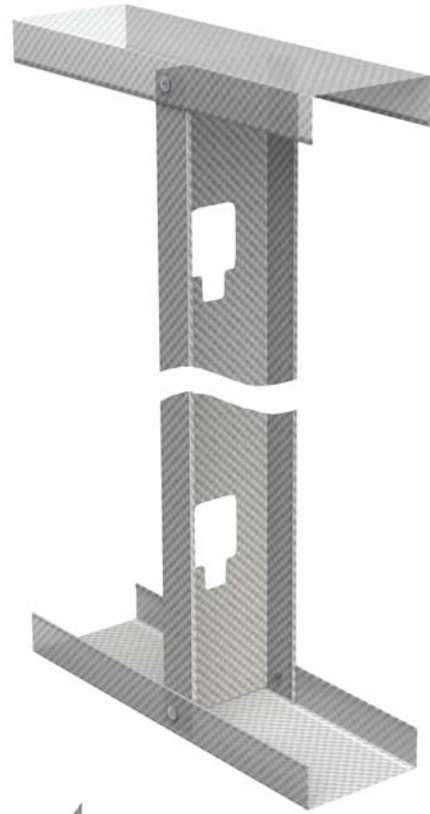


Drywall Track

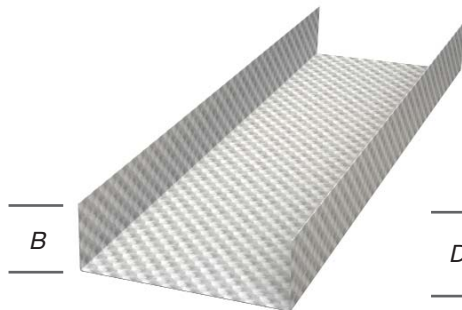

1-1/4" Leg Drywall Track

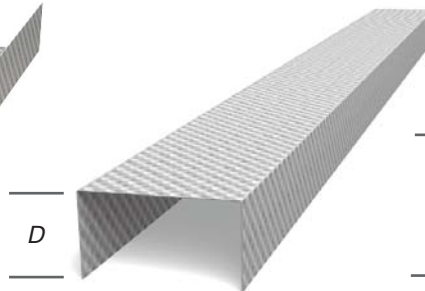

2" Leg Drywall Track

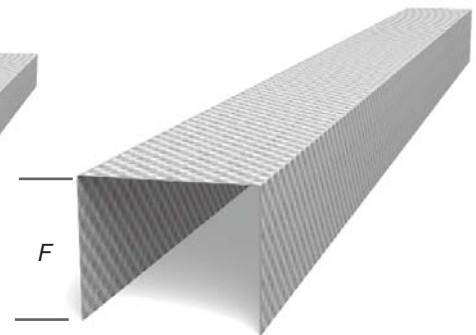

3" Leg Drywall Track

Dietrich UltraSTEEL® Track Section Properties 25-Gauge EQ

| Member Information | | | | | | | Gross Section Properties | | | | | | | Effective Properties | | | Torsional Properties | | | | | |
|---------------------|-------------|-----------|-------|------|----------------------------|---------------------------------|--------------------------|--------------------------|------------------------------------|------------------------------------|----------------------|------------------------------------|------------------------------------|----------------------|-------------------------------------|-------------------------------------|---------------------------|----------------------|----------------------------|------------------------------------|----------------------|--------|
| Nominal Depth (in.) | Designation | Leg (in.) | Gauge | Mils | Base Metal Thickness (in.) | Effective Metal Thickness (in.) | Weight (lb./ft.) | Area (in. ²) | I _x (in. ⁴) | S _x (in. ³) | R _x (in.) | I _y (in. ⁴) | S _y (in. ³) | R _y (in.) | I _{xe} (in. ⁴) | S _{xe} (in. ³) | M _{xa} (in.-lb.) | X _o (in.) | J'1000 (in. ⁴) | C _w (in. ⁶) | R _o (in.) | B Beta |
| 1.625 | UTNB | 1.25 | 25 EQ | 15 | 0.015 | 0.035 | 0.219 | 0.064 | 0.032 | 0.038 | 0.702 | 0.011 | 0.013 | 0.412 | 0.020 | 0.017 | 400 | -0.887 | 0.005 | 0.005 | 1.204 | 0.457 |
| | UTND | 2.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.300 | 0.088 | 0.048 | 0.058 | 0.736 | 0.039 | 0.047 | 0.662 | 0.025 | 0.016 | 389 | -1.587 | 0.007 | 0.019 | 1.870 | 0.280 |
| | UTNF | 3.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.407 | 0.120 | 0.069 | 0.083 | 0.759 | 0.115 | 0.139 | 0.980 | 0.027 | 0.017 | 410 | -2.551 | 0.010 | 0.059 | 2.837 | 0.191 |
| 2.500 | UTNB | 1.25 | 25 EQ | 15 | 0.015 | 0.035 | 0.266 | 0.078 | 0.082 | 0.065 | 1.023 | 0.013 | 0.010 | 0.401 | 0.058 | 0.026 | 627 | -0.776 | 0.007 | 0.014 | 1.345 | 0.668 |
| | UTND | 2.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.347 | 0.102 | 0.119 | 0.094 | 1.082 | 0.045 | 0.035 | 0.662 | 0.067 | 0.026 | 621 | -1.437 | 0.008 | 0.050 | 1.917 | 0.438 |
| | UTNF | 3.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.454 | 0.134 | 0.169 | 0.134 | 1.126 | 0.132 | 0.105 | 0.995 | 0.069 | 0.027 | 653 | -2.371 | 0.011 | 0.153 | 2.807 | 0.287 |
| 3.625 | UTNB | 1.25 | 25 EQ | 15 | 0.015 | 0.035 | 0.327 | 0.096 | 0.191 | 0.105 | 1.411 | 0.014 | 0.008 | 0.382 | 0.133 | 0.038 | 920 | -0.671 | 0.008 | 0.033 | 1.609 | 0.826 |
| | UTND | 2.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.407 | 0.120 | 0.270 | 0.148 | 1.501 | 0.050 | 0.028 | 0.649 | 0.144 | 0.039 | 923 | -1.287 | 0.010 | 0.117 | 2.081 | 0.618 |
| | UTNF | 3.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.515 | 0.151 | 0.374 | 0.205 | 1.573 | 0.150 | 0.082 | 0.995 | 0.154 | 0.039 | 939 | -2.178 | 0.013 | 0.352 | 2.865 | 0.422 |
| 4.000 | UTNB | 1.25 | 25 EQ | 15 | 0.015 | 0.035 | 0.347 | 0.102 | 0.241 | 0.119 | 1.537 | 0.014 | 0.007 | 0.375 | 0.162 | 0.042 | 1018 | -0.643 | 0.008 | 0.042 | 1.707 | 0.858 |
| | UTND | 2.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.428 | 0.126 | 0.336 | 0.167 | 1.636 | 0.052 | 0.026 | 0.643 | 0.177 | 0.043 | 1023 | -1.244 | 0.010 | 0.147 | 2.153 | 0.666 |
| | UTNF | 3.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.535 | 0.157 | 0.464 | 0.230 | 1.717 | 0.155 | 0.077 | 0.992 | 0.188 | 0.044 | 1053 | -2.122 | 0.013 | 0.440 | 2.904 | 0.466 |
| 6.000* | UTNB | 1.25 | 25 EQ | 15 | 0.015 | 0.035 | 0.454 | 0.134 | 0.636 | 0.211 | 2.182 | 0.016 | 0.005 | 0.343 | - | - | - | -0.526 | 0.011 | 0.107 | 2.270 | 0.946 |
| | UTND | 2.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.535 | 0.157 | 0.850 | 0.282 | 2.325 | 0.058 | 0.019 | 0.609 | - | - | - | -1.061 | 0.013 | 0.377 | 2.627 | 0.837 |
| | UTNF | 3.00 | 25 EQ | 15 | 0.015 | 0.035 | 0.643 | 0.189 | 1.136 | 0.377 | 2.452 | 0.176 | 0.058 | 0.966 | - | - | - | -1.869 | 0.016 | 1.118 | 3.231 | 0.665 |

Dietrich UltraSTEEL® Track Section Properties 20 DW-Gauge EQ

| Member Information | | | | | | | Gross Section Properties | | | | | | | Effective Properties | | | Torsional Properties | | | | | |
|---------------------|-------------|-----------|-------|------|----------------------------|---------------------------------|--------------------------|--------------------------|------------------------------------|------------------------------------|----------------------|------------------------------------|------------------------------------|----------------------|-------------------------------------|-------------------------------------|---------------------------|----------------------|----------------------------|------------------------------------|----------------------|--------|
| Nominal Depth (in.) | Designation | Leg (in.) | Gauge | Mils | Base Metal Thickness (in.) | Effective Metal Thickness (in.) | Weight (lb./ft.) | Area (in. ²) | I _x (in. ⁴) | S _x (in. ³) | R _x (in.) | I _y (in. ⁴) | S _y (in. ³) | R _y (in.) | I _{xe} (in. ⁴) | S _{xe} (in. ³) | M _{xa} (in.-lb.) | X _o (in.) | J'1000 (in. ⁴) | C _w (in. ⁶) | R _o (in.) | B Beta |
| 1.625 | UTEB | 1.25 | 20 EQ | 25 | 0.025 | 0.055 | 0.365 | 0.107 | 0.053 | 0.064 | 0.705 | 0.018 | 0.022 | 0.410 | 0.040 | 0.035 | 841 | -0.881 | 0.025 | 0.009 | 1.201 | 0.462 |
| | UTED | 2.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.500 | 0.147 | 0.080 | 0.096 | 0.740 | 0.064 | 0.076 | 0.661 | 0.048 | 0.038 | 903 | -1.580 | 0.034 | 0.032 | 1.866 | 0.283 |
| | UTEF | 3.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.679 | 0.199 | 0.116 | 0.139 | 0.763 | 0.191 | 0.228 | 0.979 | 0.055 | 0.039 | 945 | -2.545 | 0.046 | 0.100 | 2.831 | 0.192 |
| 2.500 | UTEB | 1.25 | 20 EQ | 25 | 0.025 | 0.055 | 0.444 | 0.130 | 0.137 | 0.108 | 1.026 | 0.021 | 0.016 | 0.399 | 0.106 | 0.065 | 1565 | -0.770 | 0.030 | 0.023 | 1.344 | 0.671 |
| | UTED | 2.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.578 | 0.170 | 0.200 | 0.157 | 1.086 | 0.074 | 0.058 | 0.660 | 0.128 | 0.069 | 1658 | -1.431 | 0.039 | 0.084 | 1.914 | 0.441 |
| | UTEF | 3.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.757 | 0.222 | 0.284 | 0.223 | 1.130 | 0.220 | 0.172 | 0.994 | 0.150 | 0.067 | 1609 | -2.364 | 0.051 | 0.256 | 2.803 | 0.288 |
| 3.625 | UTEB | 1.25 | 20 EQ | 25 | 0.025 | 0.055 | 0.544 | 0.160 | 0.320 | 0.174 | 1.414 | 0.023 | 0.013 | 0.380 | 0.259 | 0.104 | 2494 | -0.666 | 0.037 | 0.055 | 1.608 | 0.828 |
| | UTED | 2.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.679 | 0.199 | 0.451 | 0.245 | 1.504 | 0.083 | 0.045 | 0.647 | 0.312 | 0.102 | 2443 | -1.281 | 0.046 | 0.195 | 2.079 | 0.620 |
| | UTEF | 3.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.858 | 0.252 | 0.627 | 0.341 | 1.577 | 0.249 | 0.135 | 0.993 | 0.367 | 0.101 | 2408 | -2.172 | 0.058 | 0.587 | 2.862 | 0.424 |
| 4.000 | UTEB | 1.25 | 20 EQ | 25 | 0.025 | 0.055 | 0.578 | 0.170 | 0.402 | 0.198 | 1.539 | 0.024 | 0.012 | 0.373 | 0.330 | 0.114 | 2736 | -0.638 | 0.039 | 0.069 | 1.707 | 0.860 |
| | UTED | 2.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.712 | 0.209 | 0.562 | 0.277 | 1.639 | 0.086 | 0.042 | 0.641 | 0.397 | 0.113 | 2702 | -1.239 | 0.048 | 0.245 | 2.152 | 0.669 |
| | UTEF | 3.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.891 | 0.262 | 0.775 | 0.383 | 1.721 | 0.257 | 0.127 | 0.991 | 0.464 | 0.112 | 2675 | -2.116 | 0.060 | 0.734 | 2.901 | 0.468 |
| 6.000 | UTEB | 1.25 | 20 EQ | 25 | 0.025 | 0.055 | 0.757 | 0.222 | 1.060 | 0.350 | 2.183 | 0.026 | 0.009 | 0.341 | 0.800 | 0.163 | 3900 | -0.522 | 0.051 | 0.177 | 2.271 | 0.947 |
| | UTED | 2.00 | 20 EQ | 25 | 0.025 | 0.055 | 0.891 | 0.262 | 1.419 | 0.469 | 2.327 | 0.096 | 0.032 | 0.607 | 0.999 | 0.171 | 4093 | -1.056 | 0.060 | 0.627 | 2.627 | 0.838 |
| | UTEF | 3.00 | 20 EQ | 25 | 0.025 | 0.055 | 1.070 | 0.315 | 1.897 | 0.627 | 2.455 | 0.292 | 0.097 | 0.964 | 1.070 | 0.171 | 4103 | -1.864 | 0.073 | 1.862 | 3.230 | 0.667 |

Dietrich UltraSTEEL® Track Section Properties 20 STR-Gauge EQ**

| Member Information | | | | | | | Gross Section Properties | | | | | | | Effective Properties | | | Torsional Properties | | | | | |
|---------------------|-------------|-----------|-------|------|----------------------------|---------------------------------|--------------------------|--------------------------|------------------------------------|------------------------------------|----------------------|------------------------------------|------------------------------------|----------------------|-------------------------------------|-------------------------------------|---------------------------|----------------------|----------------------------|------------------------------------|----------------------|--------|
| Nominal Depth (in.) | Designation | Leg (in.) | Gauge | Mils | Base Metal Thickness (in.) | Effective Metal Thickness (in.) | Weight (lb./ft.) | Area (in. ²) | I _x (in. ⁴) | S _x (in. ³) | R _x (in.) | I _y (in. ⁴) | S _y (in. ³) | R _y (in.) | I _{xe} (in. ⁴) | S _{xe} (in. ³) | M _{xa} (in.-lb.) | X _o (in.) | J'1000 (in. ⁴) | C _w (in. ⁶) | R _o (in.) | B Beta |
| 1.625 | UTXB | 1.25 | 20 EQ | 28 | 0.028 | 0.061 | 0.409 | 0.120 | 0.060 | 0.071 | 0.706 | 0.020 | 0.024 | 0.410 | 0.046 | 0.041 | 987 | -0.879 | 0.035 | 0.010 | 1.200 | 0.463 |
| | UTXD | 2.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.559 | 0.164 | 0.090 | 0.107 | 0.741 | 0.072 | 0.085 | 0.660 | 0.056 | 0.044 | 1063 | -1.578 | 0.048 | 0.036 | 1.864 | 0.283 |
| | UTXF | 3.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.760 | 0.223 | 0.131 | 0.155 | 0.765 | 0.214 | 0.254 | 0.978 | 0.065 | 0.047 | 1114 | -2.542 | 0.065 | 0.112 | 2.829 | 0.193 |
| 2.500 | UTXB | 1.25 | 20 EQ | 28 | 0.028 | 0.061 | 0.497 | 0.146 | 0.154 | 0.120 | 1.027 | 0.023 | 0.018 | 0.398 | 0.123 | 0.076 | 1820 | -0.769 | 0.042 | 0.026 | 1.343 | 0.673 |
| | UTXD | 2.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.647 | 0.190 | 0.225 | 0.176 | 1.087 | 0.083 | 0.065 | 0.660 | 0.148 | 0.082 | 1971 | -1.430 | 0.055 | 0.094 | 1.913 | 0.442 |
| | UTXF | 3.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.848 | 0.249 | 0.319 | 0.249 | 1.132 | 0.246 | 0.192 | 0.993 | 0.173 | 0.083 | 1999 | -2.362 | 0.072 | 0.287 | 2.801 | 0.289 |
| 3.625 | UTXB | 1.25 | 20 EQ | 28 | 0.028 | 0.061 | 0.610 | 0.179 | 0.358 | 0.195 | 1.414 | 0.026 | 0.014 | 0.379 | 0.294 | 0.132 | 3165 | -0.665 | 0.052 | 0.062 | 1.608 | 0.829 |
| | UTXD | 2.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.760 | 0.223 | 0.506 | 0.275 | 1.505 | 0.093 | 0.051 | 0.646 | 0.356 | 0.128 | 3059 | -1.280 | 0.065 | 0.219 | 2.079 | 0.621 |
| | UTXF | 3.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.961 | 0.282 | 0.703 | 0.382 | 1.578 | 0.278 | 0.151 | 0.993 | 0.420 | 0.125 | 2995 | -2.170 | 0.082 | 0.658 | 2.861 | 0.425 |
| 4.000 | UTXB | 1.25 | 20 EQ | 28 | 0.028 | 0.061 | 0.647 | 0.190 | 0.451 | 0.222 | 1.539 | 0.026 | 0.013 | 0.373 | 0.375 | 0.144 | 3459 | -0.637 | 0.055 | 0.077 | 1.707 | 0.861 |
| | UTXD | 2.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.798 | 0.234 | 0.630 | 0.311 | 1.640 | 0.096 | 0.047 | 0.640 | 0.453 | 0.141 | 3379 | -1.237 | 0.068 | 0.274 | 2.152 | 0.669 |
| | UTXF | 3.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.998 | 0.293 | 0.869 | 0.428 | 1.722 | 0.287 | 0.142 | 0.990 | 0.533 | 0.139 | 3325 | -2.114 | 0.085 | 0.823 | 2.900 | 0.469 |
| 6.000 | UTXB | 1.25 | 20 EQ | 28 | 0.028 | 0.061 | 0.848 | 0.249 | 1.188 | 0.392 | 2.184 | 0.029 | 0.010 | 0.341 | 0.941 | 0.200 | 4784 | -0.521 | 0.072 | 0.197 | 2.271 | 0.947 |
| | UTXD | 2.00 | 20 EQ | 28 | 0.028 | 0.061 | 0.998 | 0.293 | 1.590 | 0.525 | 2.328 | 0.108 | 0.036 | 0.606 | 1.233 | 0.212 | 5090 | -1.055 | 0.085 | 0.702 | 2.627 | 0.839 |
| | UTXF | 3.00 | 20 EQ | 28 | 0.028 | 0.061 | 1.199 | 0.352 | 2.125 | 0.702</ | | | | | | | | | | | | |