


## Provides a clean finished edge for wallboard and can be installed after gypsum panel installation.

- Hemmed front flange for rigidity.
- Knurled, perforated flange enhances joint compound adhesion.
- Easy to attach and finish.



Dietrich metal L-Trim is used to provide a clean finished edge at door and window openings or when wallboard abuts dissimilar surfaces such as suspended ceilings, beams, plaster, masonry and concrete. L-Trim is installed after the gypsum panels are already in place, unlike Spackle J, which must be installed during gypsum panel installation. L-Trim is easily attached with screws or nails after the panels are in place. Installation is completed with joint compound for a smooth ready-to-paint surface.

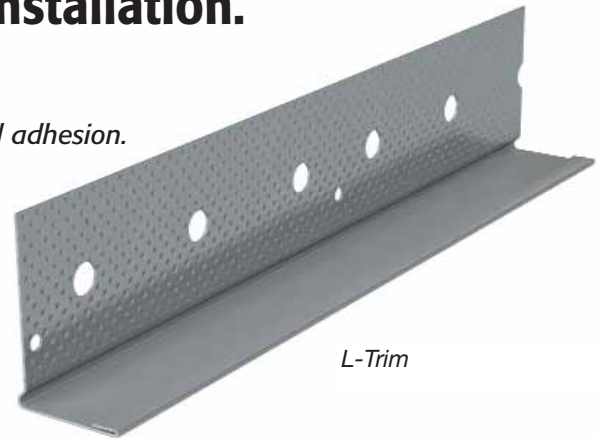

### Metal L-Trim (M20B)

| DMF Product Code | Size   |      |        |      | Weight/Carton |      | Packaging   |               |
|------------------|--------|------|--------|------|---------------|------|-------------|---------------|
|                  | Width  |      | Length |      | lbs           | kg   | Pcs/ Carton | Cartons/ Skid |
|                  | Inches | mm   | ft-in  | m    |               |      |             |               |
| M20B             | 1/2    | 12.7 | 8-0    | 2.44 | 28.0          | 12.7 | 50          | 50            |
|                  |        |      | 10-0   | 3.05 | 35.0          | 15.9 | 50          | 50            |
|                  | 5/8    | 15.9 | 8-0    | 2.44 | 28.0          | 12.7 | 50          | 50            |
|                  |        |      | 10-0   | 3.05 | 35.0          | 15.9 | 50          | 50            |