


The Spazzer® Bar Fly Clip is a pre-punched clip that eliminates the need for cutting and bending when using the Spazzer® 5400 Spacer Bar to facilitate the rapid erection of exterior curtain wall framing.

- Pre-punched for faster and more accurate fastener placement
- Eliminates the need to cut and bend
- Reduces labor

The Spazzer® Bar Fly Clip is a secure, fast and efficient way to finish a wall section when using the TradeReady® Spazzer® 5400 Spacing Bar to facilitate the rapid erection of exterior curtain wall framing. Traditionally, at the end of a section, the Spazzer Bar would need to be cut and bent to keep the bar in place. With the new Spazzer Bar Fly Clip, installation is as easy as fastening the pre-punched clip to the stud and the Spazzer Bar. The excess Spazzer Bar is cut, and installation is complete. The Spazzer 5400 Spacing Bar is a pre-notched, galvanized steel spacer and bridging bar that was engineered to provide excellent torsional and lateral stud restraint.

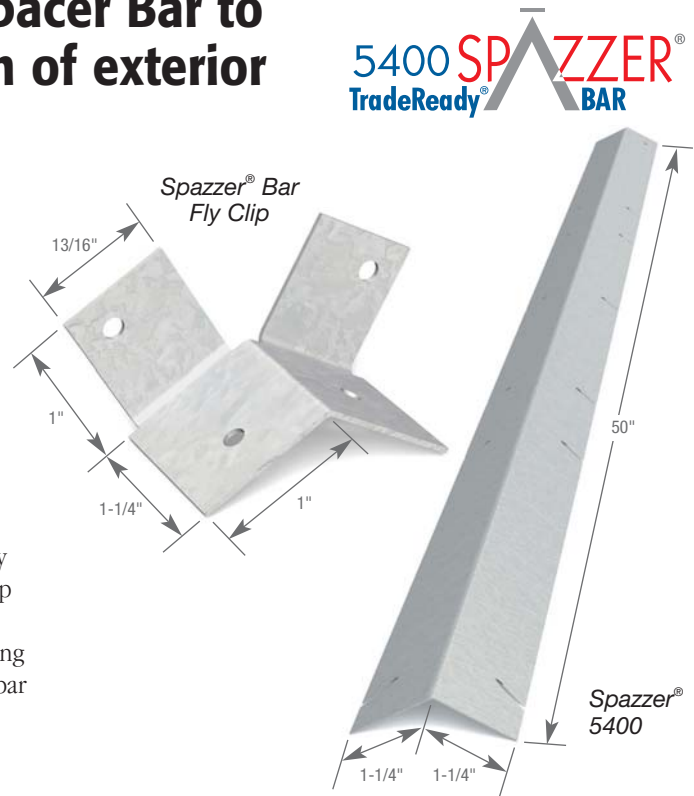

Alternative Products

Traditional cutting and bending

Product Dimensions

1" x 1-1/4" x 1" (25.4mm x 31.8mm x 25.4mm)

Material Specifications

Gauge: 18 gauge (43 mils)

Design Thickness: 0.0451 inches (1.145mm)

Coating: G90 (Z275) hot-dipped galvanized or equivalent corrosion resistance

Yield Strength: 50 ksi (340 MPa)

ASTM: A 653/A 653M

Spazzer® Bar Fly Clip

DMF Product Code	Size		Weight/Piece		Packaging Pcs/Box
	Inches	mm	lbs	kg	
SFLY	1 x 1-1/4 x 1	25.4 x 31.8 x 25.4	0.08	0.036	100

Spazzer® 5400

DMF Product Code	Thickness			Size		Weight/Piece		Packaging		
	Gauge	Mils	Design Thickness		Inches	mm	lbs	kg	Pcs/Bundle	Pcs/Skid
			Inches	mm						
SPZS	16	54	0.0566	1.438	1-1/4 x 1-1/4 x 50	31.8 x 31.8 x 1270	2.060	0.932	NA	680

*When bridging 8" wall studs the allowable moment capacity calculated in accordance with Section C3.1.2.1 of the North American Specification for the Design of Cold-Formed Steel Structural Members should be factored by 0.9 for U-Channel, and 0.8 for Spazzer 5400. Contact Dietrich Design Group at 1-800-873-2443 for additional clarification if needed.

Installation

Load-Bearing Wall Installation:

The TradeReady® Spazzer 5400 bar is passed through the stud knockouts and rotated 90 degrees into position, engaging each side of the knockout. In load-bearing applications, some type of attachment is required to keep the bar in place. The Spazzer Bar Fly Clip is an optimum labor-saving solution. The TradeReady Spazzer 5400 bar should be installed at a maximum 4'O.C. vertically or per specifications. The Spazzer Bar should not be used in stud over 8" wide.

